


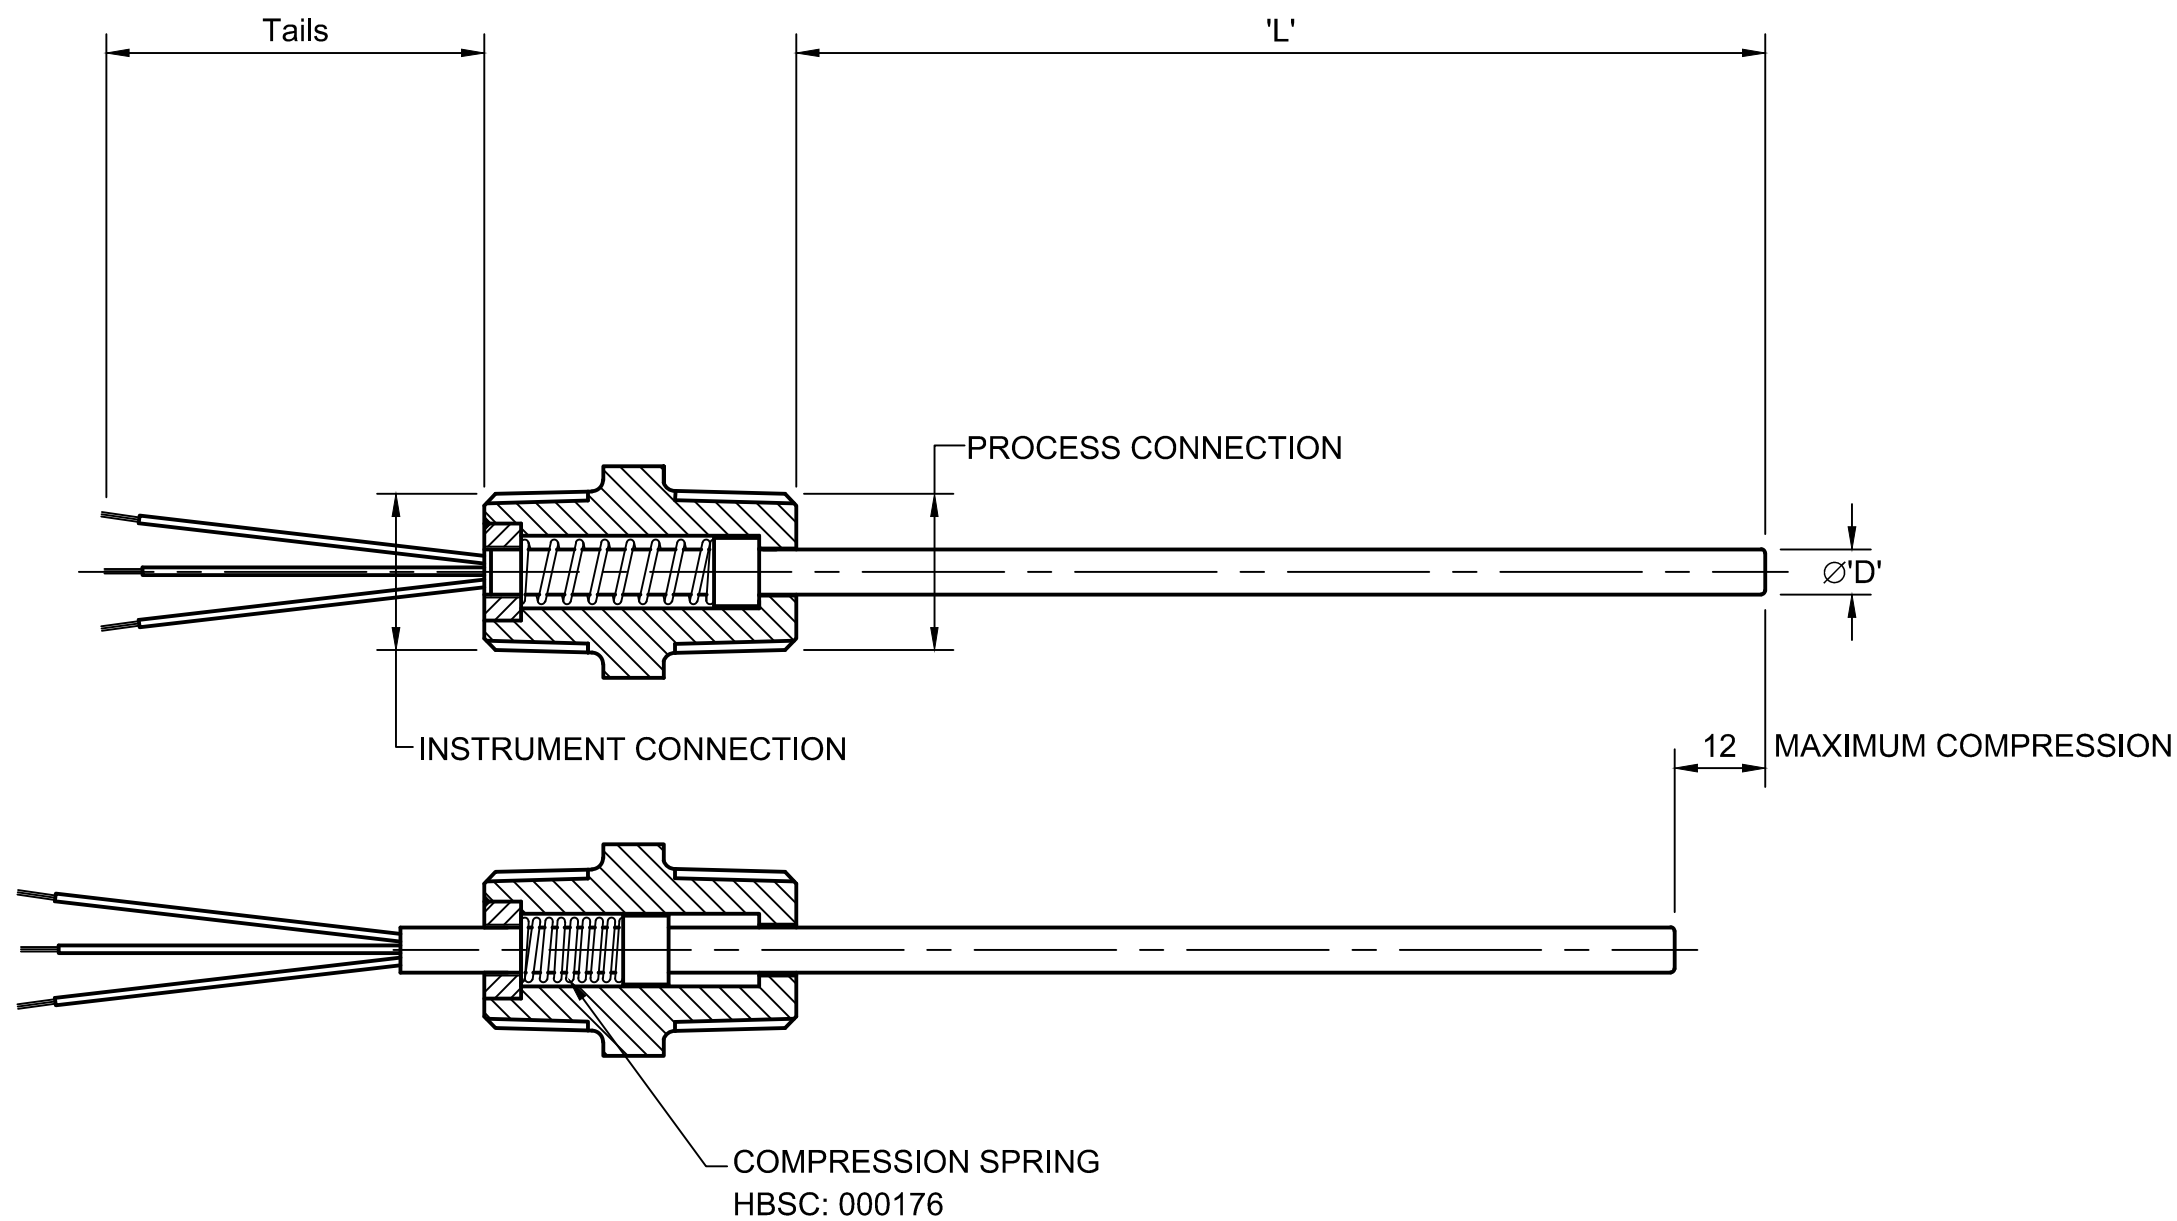

RTD160 – RTD Spring Loaded Sensor with Thread
RTD160

Sensor Configuration	
Simplex	S
Duplex	D
Triplex	T
Sensor Wiring	
2 Wire	2
3 Wire	3
4 Wire	4
Sensor Type	
Pt100	100
Pt1000	1000
Sensor Class	
Class B	B
Class A	A
1/3 DIN	3
1/5 DIN	5
1/10 DIN	10
Sheath Material	
316 Stainless Steel	316
Sheath Diameter Ø	
6mm	6
Xmm	X
Sheath Length (L)	
Xmm	X
Process Connection – Thread Size	
¼"	14
½"	12
¾"	34
1"	1
Process Connection – Thread Type	
BSPP	BP
BSPT	BT
NPT	NT
Instrument Connection – Thread Size	
¼"	14
½"	12
¾"	34
1"	1
Instrument Connection – Thread Type	
BSPP	BP
BSPT	BT
NPT	NT
Tails Length	
100mm	100
Xmm	X
Design Temperature	
Low (-196°C to +100°C)	L
Standard (-50°C to +250°C)	S
High (-50°C to +650°C)	H

Example Ordering Code:

RTD160-S-3-100-A-316-6-150-12-NT-12-BP-100-S