


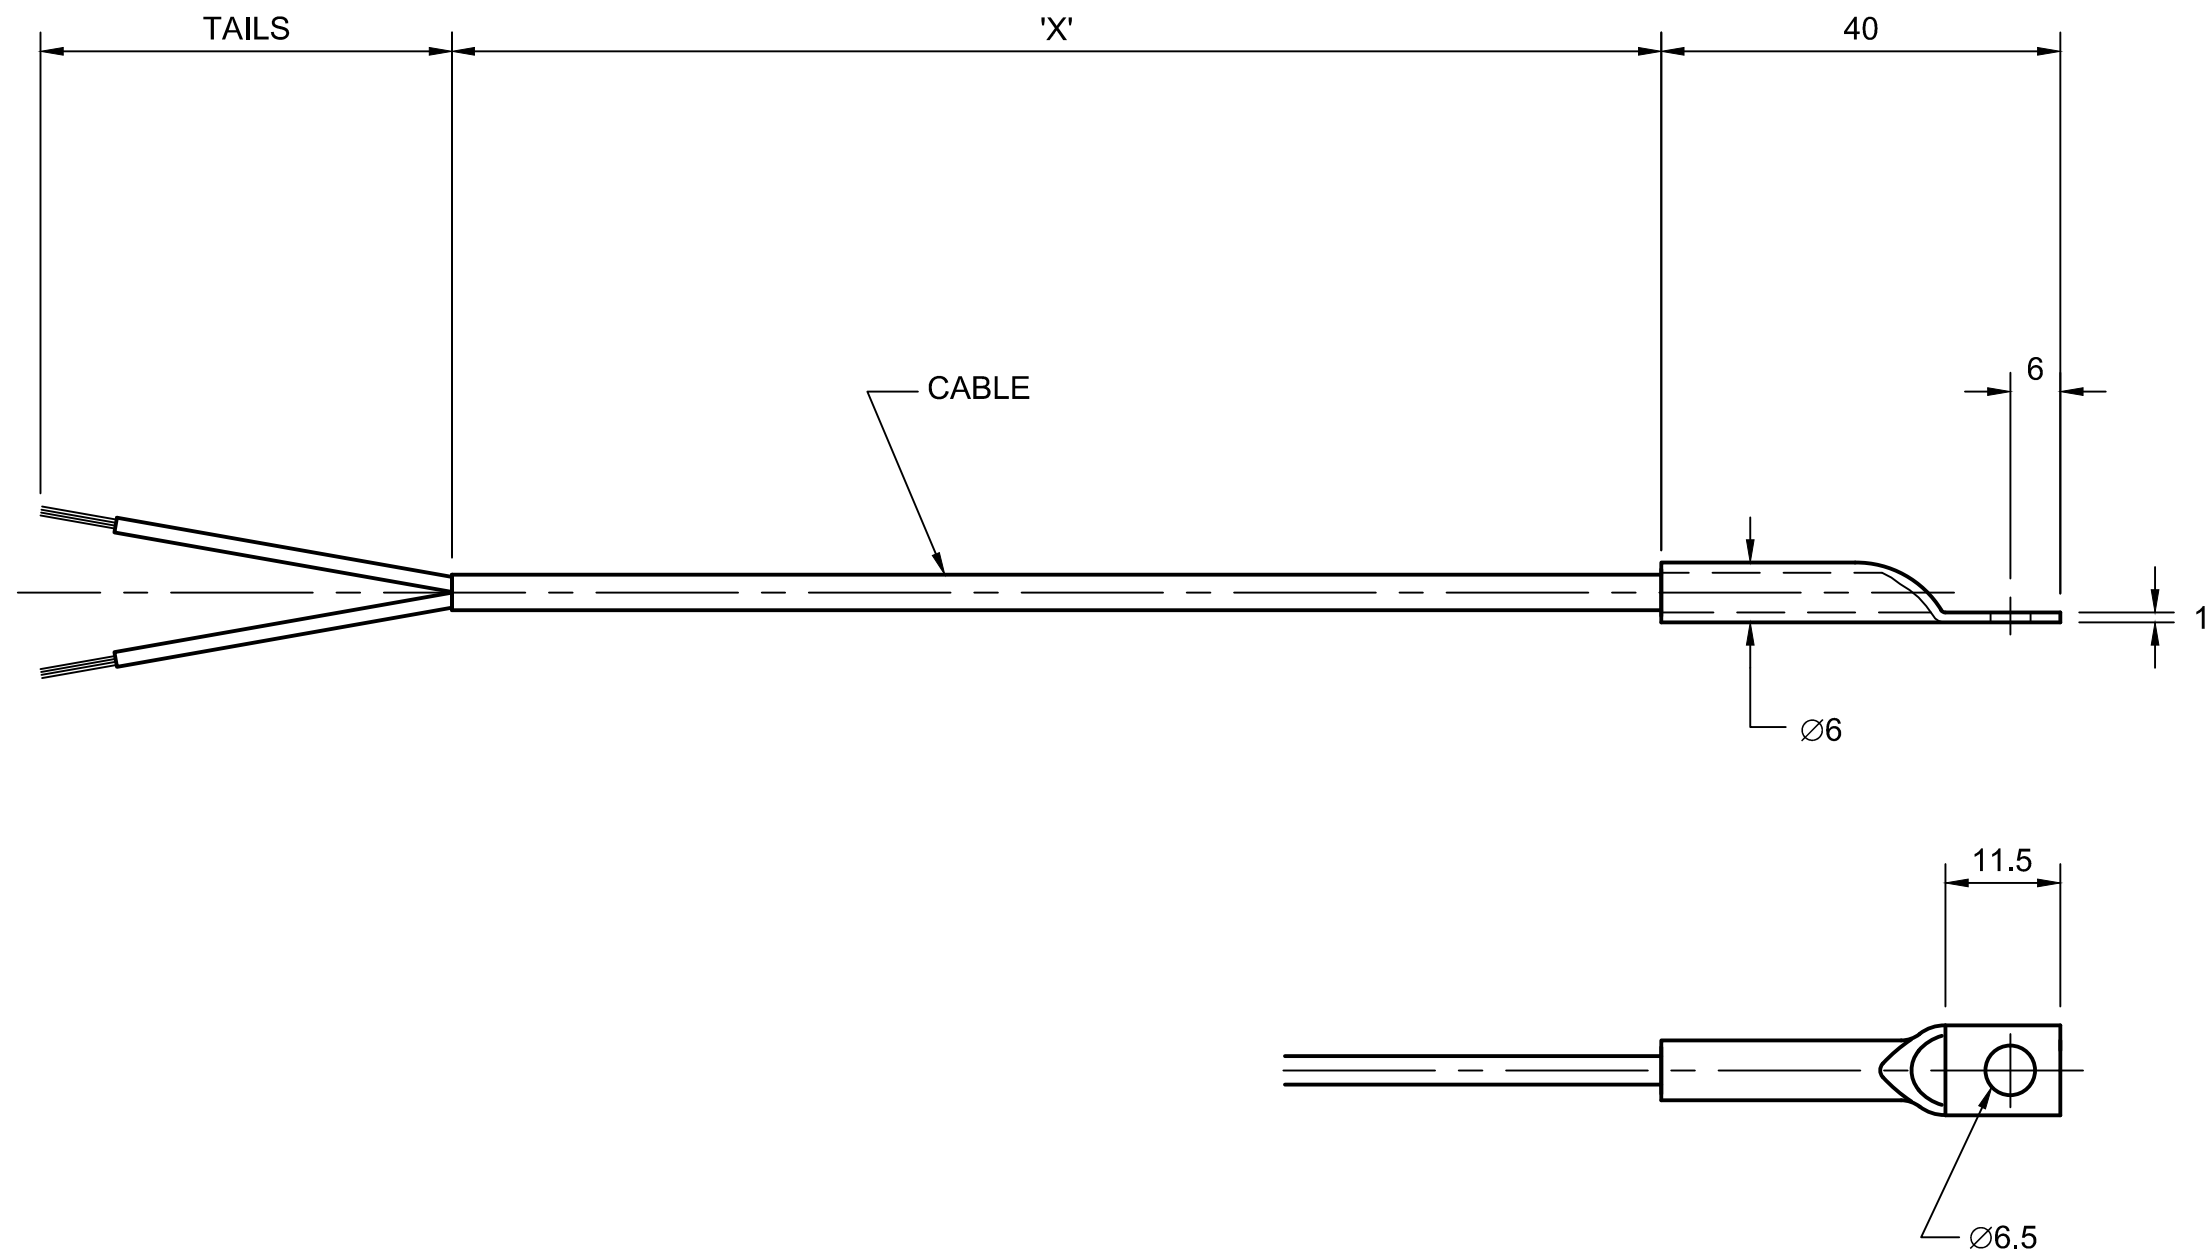

H&B Sensors Ltd

Odyssey House | Durban Road | Bognor Regis | West Sussex | PO22 9RH | UK

t: +44 [0]1243 866866
e: info@hbsensors.com
w: www.hbsensors.com

Description

RTD Bolt-On Sensor

Drawing Number

RTD730

RTD730 – RTD Bolt-On Sensor
RTD730

Sensor Configuration	
Simplex	S
Duplex	D
Triplex	T
Sensor Wiring	
2 Wire	2
3 Wire	3
4 Wire	4
Sensor Type	
Pt100	100
Pt1000	1000
Sensor Class	
Class B	B
Class A	A
1/3 DIN	3
1/5 DIN	5
1/10 DIN	10
Sheath Material	
316 Stainless Steel	316
Cable Material	
PTFE/PFA (Screened)	A
PTFE/PFA SSOB	B
PVC (Screened)	C
Fibreglass	D
Fibreglass SSOB	E
Cable Length (X)	
Xmm	X
Tails Length	
100mm	100
Xmm	X
Design Temperature	
Low (-196°C to +100°C)	L
Standard (-50°C to +250°C)	S
High (-50°C to +650°C)	H

Example Ordering Code:

RTD730-S-3-100-A-316-A-1000-50-S