


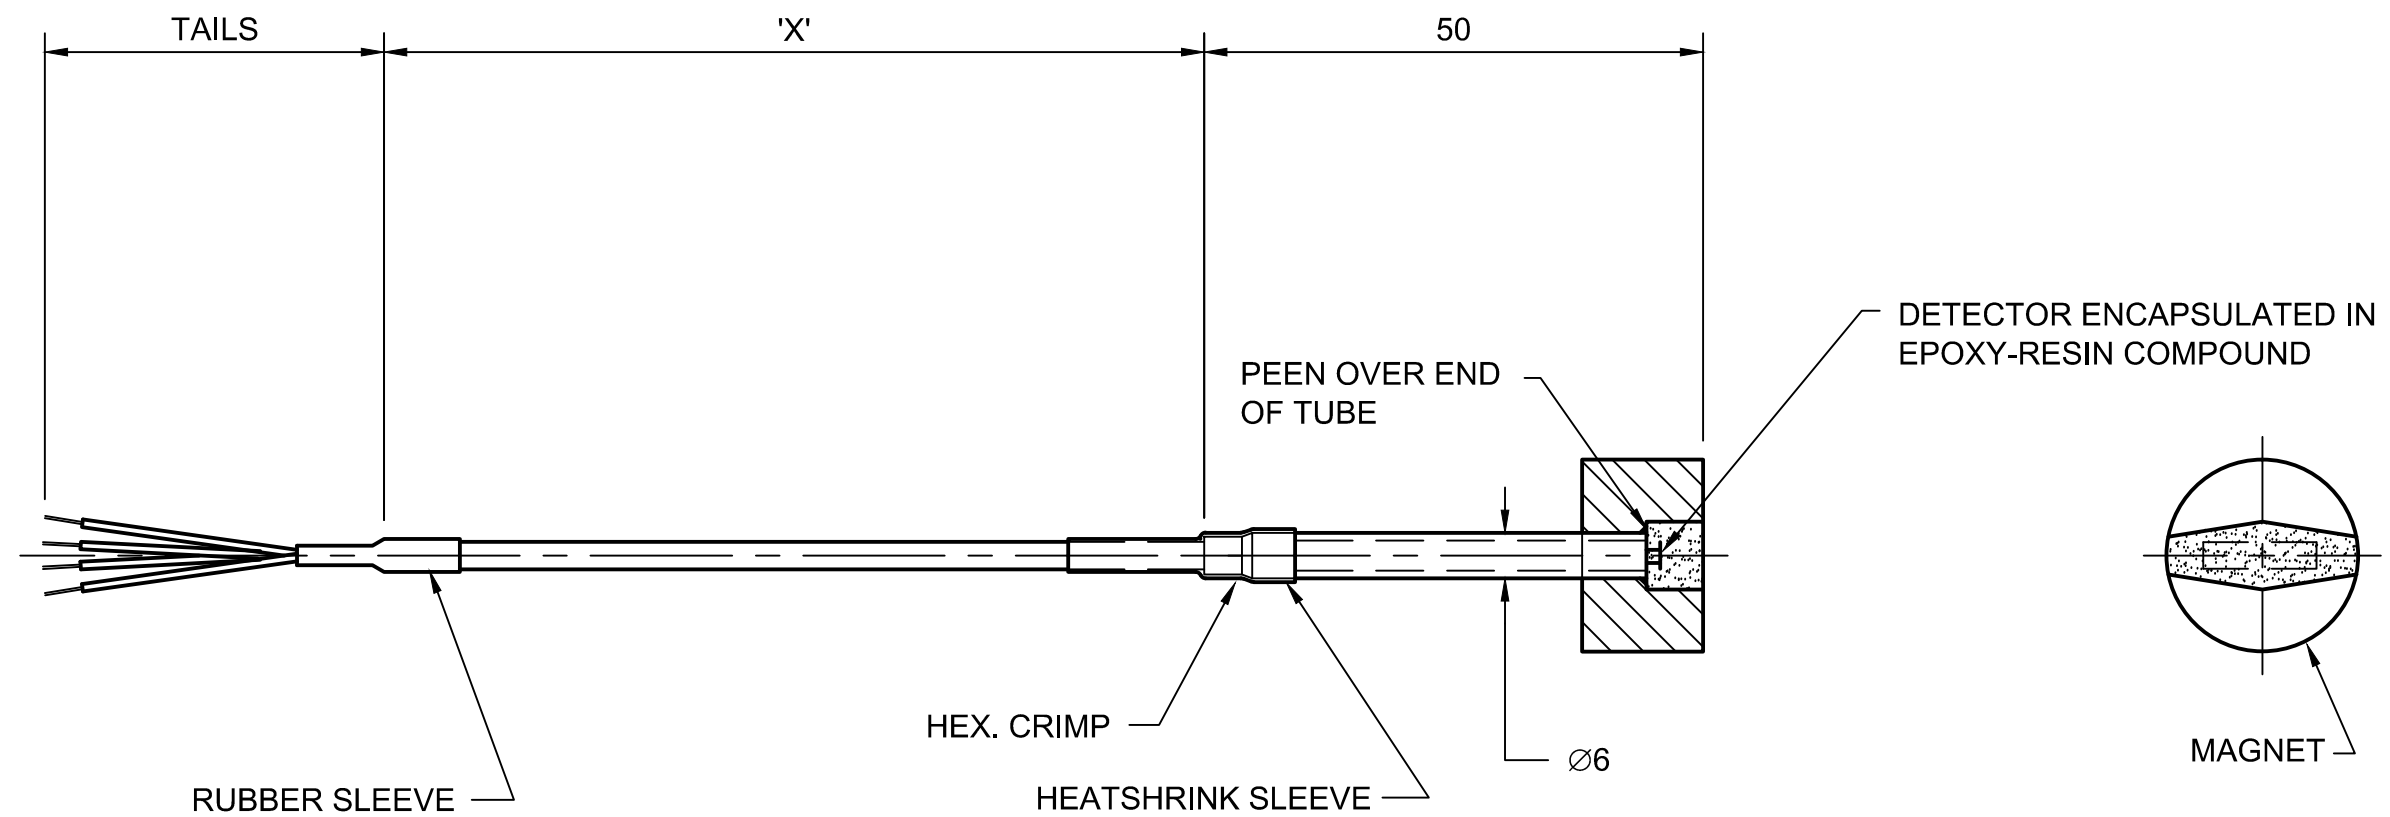

RTD740 – RTD Magnetic Sensor
RTD740

Sensor Configuration	
Simplex	S
Duplex	D
Triplex	T
Sensor Wiring	
2 Wire	2
3 Wire	3
4 Wire	4
Sensor Type	
Pt100	100
Pt1000	1000
Sensor Class	
Class B	B
Class A	A
1/3 DIN	3
1/5 DIN	5
1/10 DIN	10
Cable Material	
PTFE/PFA (Screened)	A
PTFE/PFA SSOB	B
PVC (Screened)	C
Fibreglass	D
Fibreglass SSOB	E
Cable Length (X)	
Xmm	X
Tails Length	
100mm	100
Xmm	X
Design Temperature	
Low (-196°C to +100°C)	L
Standard (-50°C to +250°C)	S
High (-50°C to +650°C)	H

Example Ordering Code:

RTD740-S-3-100-A-A-1000-50-S