


Level Float Switch

ATEX EXD Instructions

Wiring Instructions for Level Float Switch

- 1 After removing the screwed housing cover connect suitable lead wires to the appropriate terminal. The float wires are usually colour coded as per the diagram opposite. When specified, an alternative wiring method is to utilise a common white wire to each float.
- 2 On completion replace the screwed housing cover and tighten the locking screw.

Style 1	
Material	316 Stainless Steel
Maximum Operating Temperature	100°C
Maximum Operating Pressure	20 Bar
Special Gravity	0.75
Style 2	
Material	316 Stainless Steel
Maximum Operating Temperature	100°C
Maximum Operating Pressure	30 Bar
Special Gravity	0.53
Style 3	
Material	Bung - N
Maximum Operating Temperature	100°C
Maximum Operating Pressure	15 Bar
Special Gravity	0.47

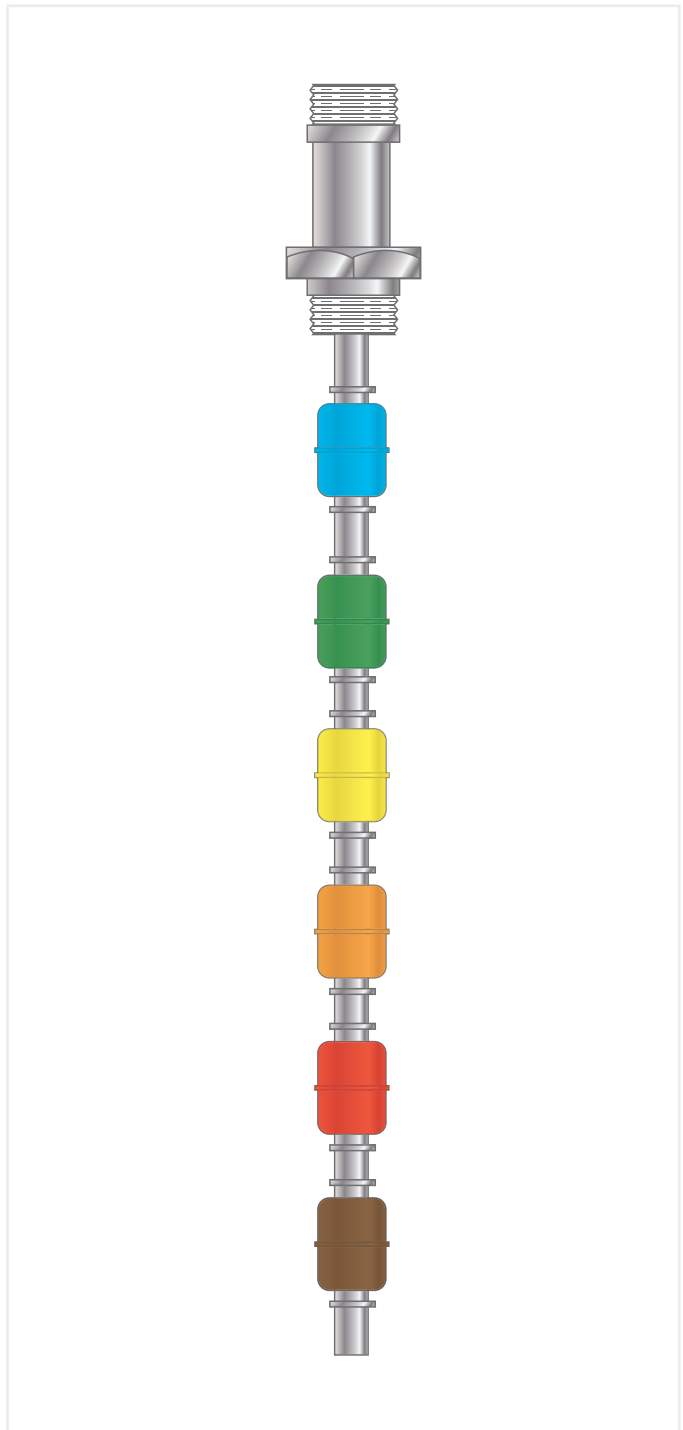

Level Float Switch

ATEX EXD Instructions

The apparatus must be installed and maintained by competent technicians familiar with the relevant requirements for installation of equipment in potentially explosive atmospheres e.g. EN60079-14, plus any local codes of practice.

Mechanical

Exd IIC T3-T6 (Tamb +55°C to +170°C)

CE 0518 Sira 00ATEXM050

 II 2 GD Sira 00ATEX1029

Label will be marked with only one T Class and corresponding Tamb rating.

Material of Construction

Cast aluminium alloy (LM6M or equivalent) or 316 stainless steel.

The O ring seal is manufactured of nitrile rubber BS 0795-30N70.

Only ATEX Exd approved cable glands for the appropriate size of cable shall be used.

If the cable gland entry is not used then an ATEX Exd approved blanking plug shall be used.

The cap must be fitted at all times and firmly screwed down onto the sealing ring.

The locking screw must be screwed into place to prevent the lid being removed.

Electrical

Internal and external M5 earth lugs as specified for use in hazardous areas are provided.

Electrical components or assemblies capable of dissipating greater than 14W must not be assembled in this enclosure.

If electrical devices are fitted then reference to the appropriate literature supplied with the device must be made.

Safety

The Type 50 ATEX Exd head has been designed in such a way as to avoid physical harm or injury, which might be caused by direct or indirect contact.

The electrical equipment encased in the housing will not increase the surface temperature by more than 30°C.

Electrical devices enclosed in these housings must have built in overload protection.

The cap must not be removed when the equipment is energised or in an explosive atmosphere.

Level Float Switch

ATEX EXD Instructions

EC Declaration of Conformity

H&B Order #: **Customer Order #:**

Serial #:

In accordance with EC Directive 94/9/EC:

H&B Sensors Ltd
Odyssey House
Durban Road
Bognor Regis
West Sussex
PO22 9RH
UNITED KINGDOM

Declare the following product:

Type 50 Series ATEX Exd Head Assembly...

has been certified by H&B Sensors Ltd to the relevant EC Directive 94/9/EC. ATEX Directive Code II 2 GD.

H&B Sensors Ltd have been quality assessed and certified by Sira 0518 Quality Assurance Notification Sira 00ATEXM050 and issued with EC Type Examination Certificate Sira 00ATEX1029 against the following European Standards:

EN 60079-0:2006 including corrigendum 1
EN 60079-1:2007
With reference to IEC 60079-0:2007 in respect of marking
EN 61241-0:2006
EN 61241-1:2004

To ensure the equipment meets the requirement of all the above, the product must be installed in accordance with the instructions issued.

A copy of certificate Sira 00ATEX1029 is available on request or can be downloaded from our website:
www.hbsensors.com

Signed for on behalf of H&B Sensors Ltd:

Name **Position**

Signature **Date**